



# CHOOSE THE PROPER ONE FOR INSTALLING YOUR FAUCET

## Installation of Brass Ceramic Faucet

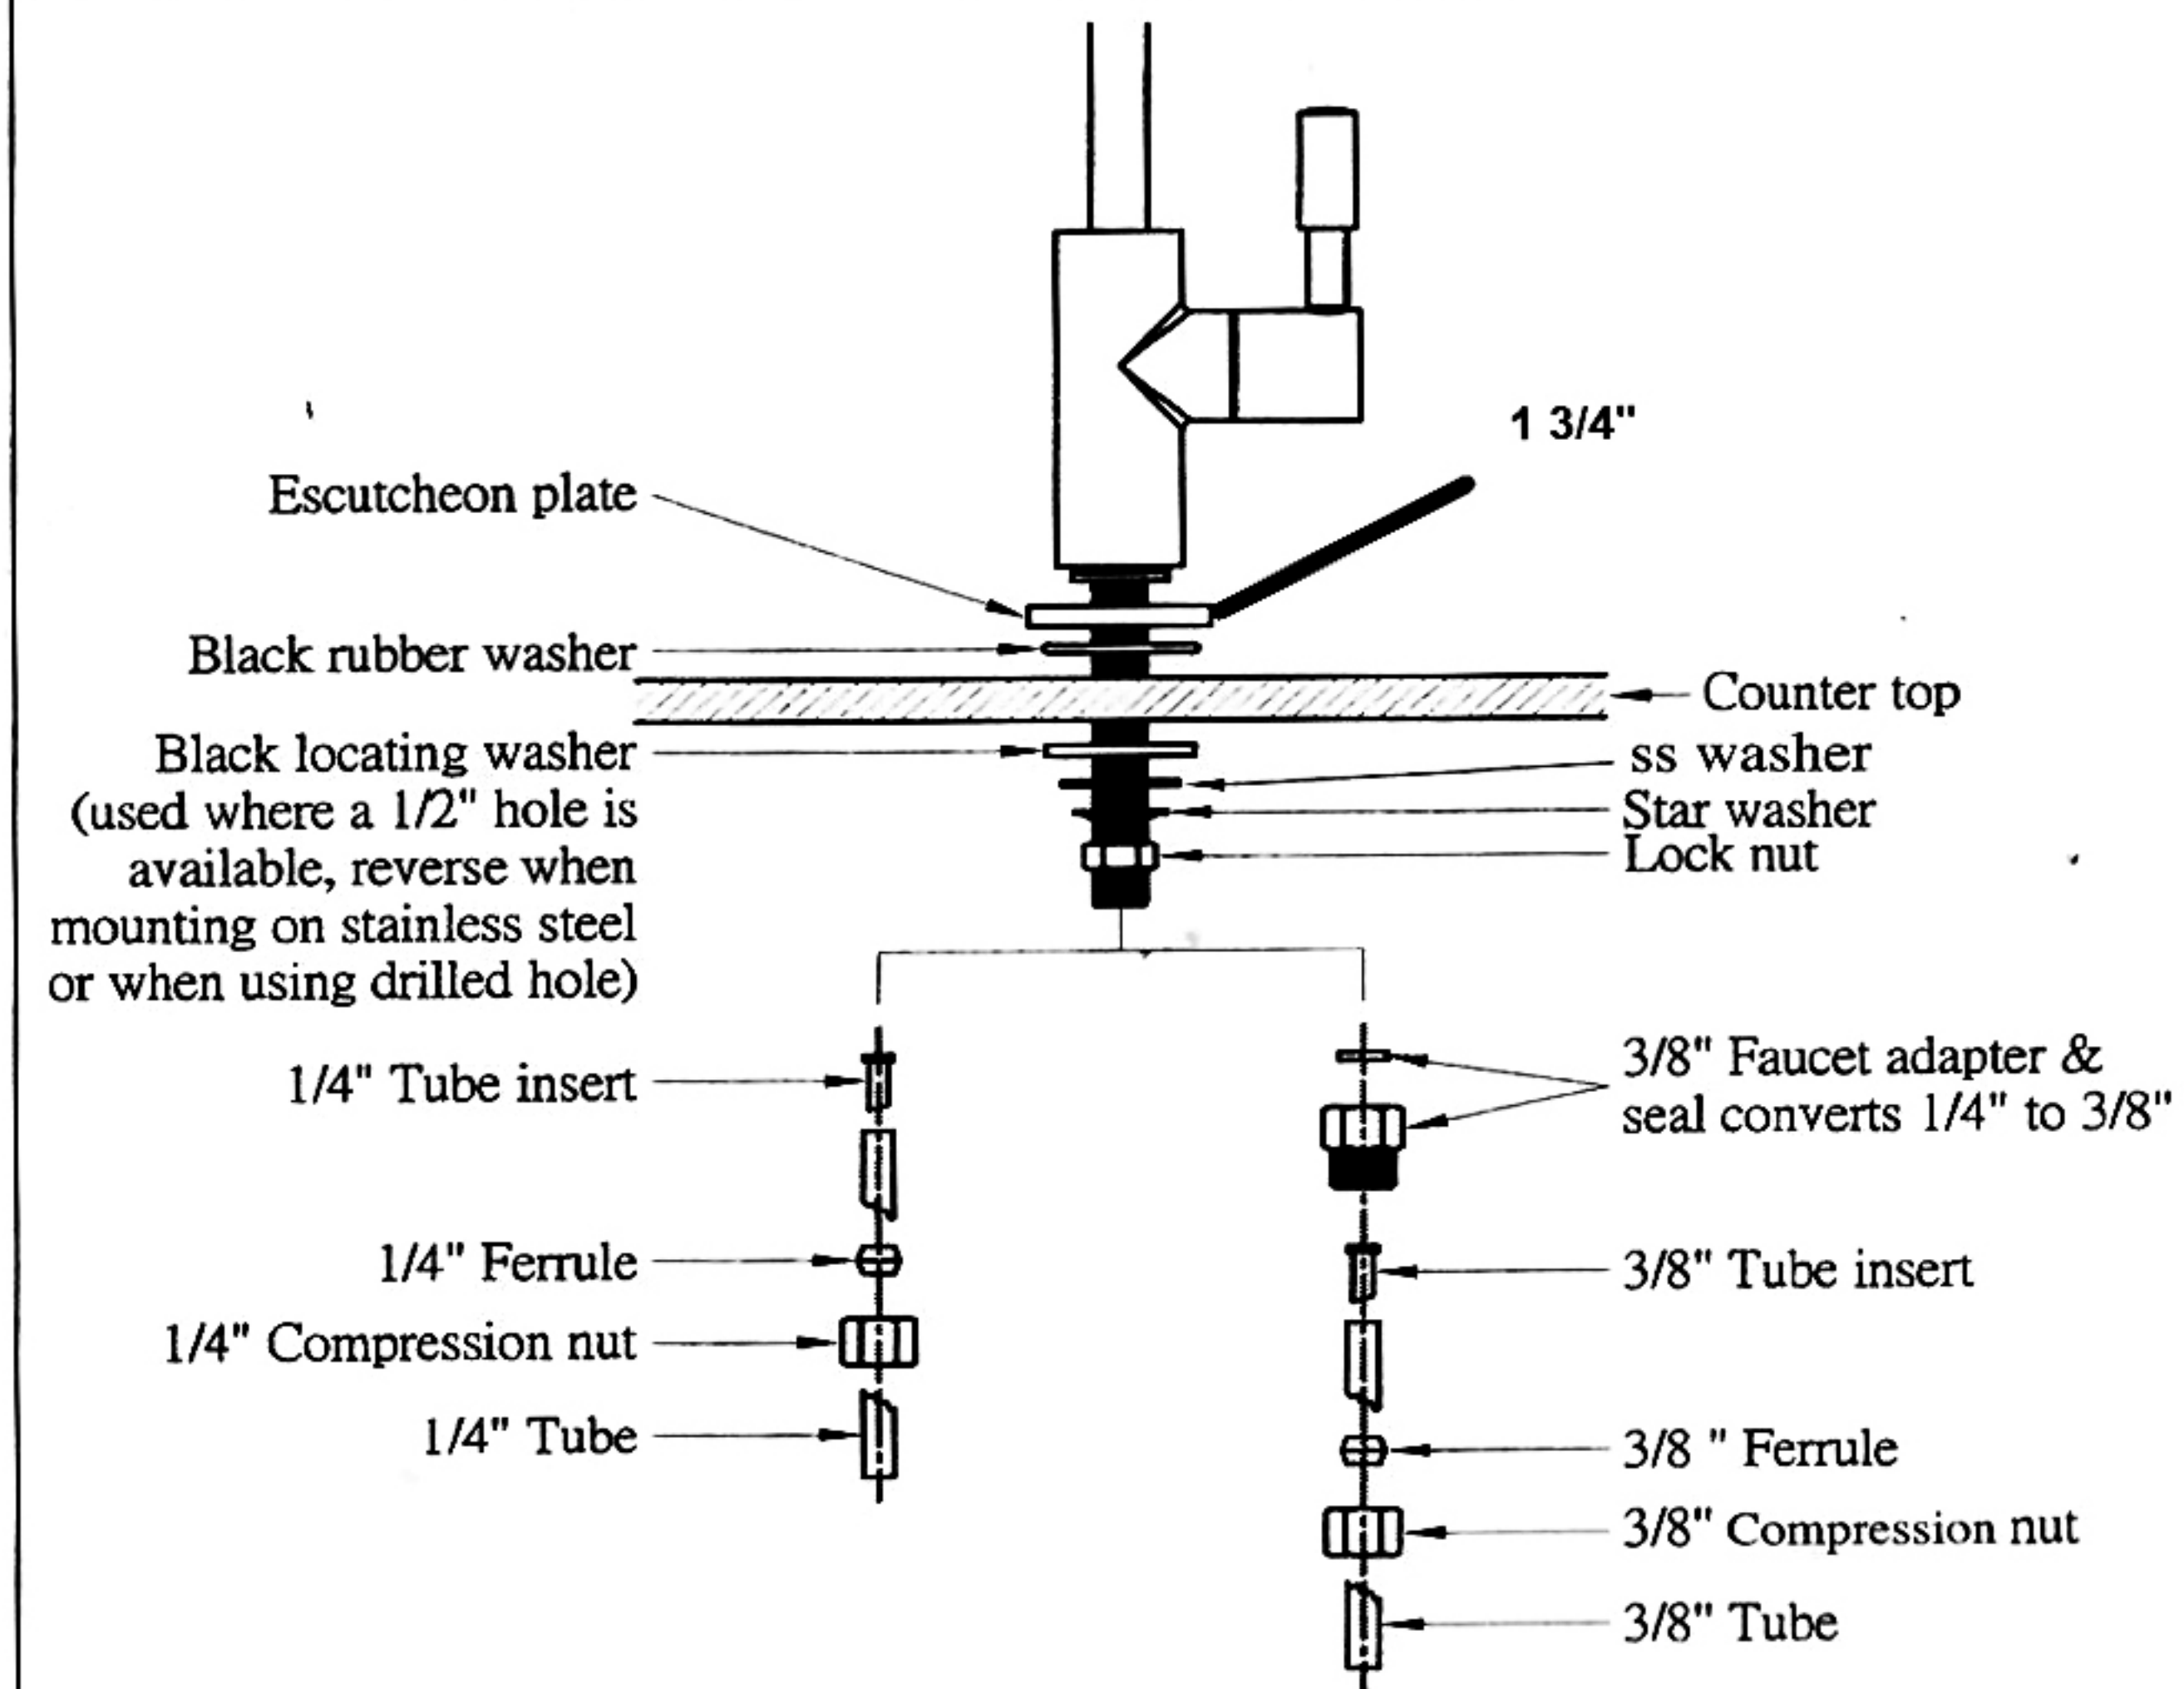


1/4" INSERT, 3/8" FAUCET ADAPTER KIT & TUBES ARE  
OPTIONAL, PLEASE CALL YOUR DEALER FOR MORE INFORMATION

## Installation of Push-In Brass Ceramic Faucet

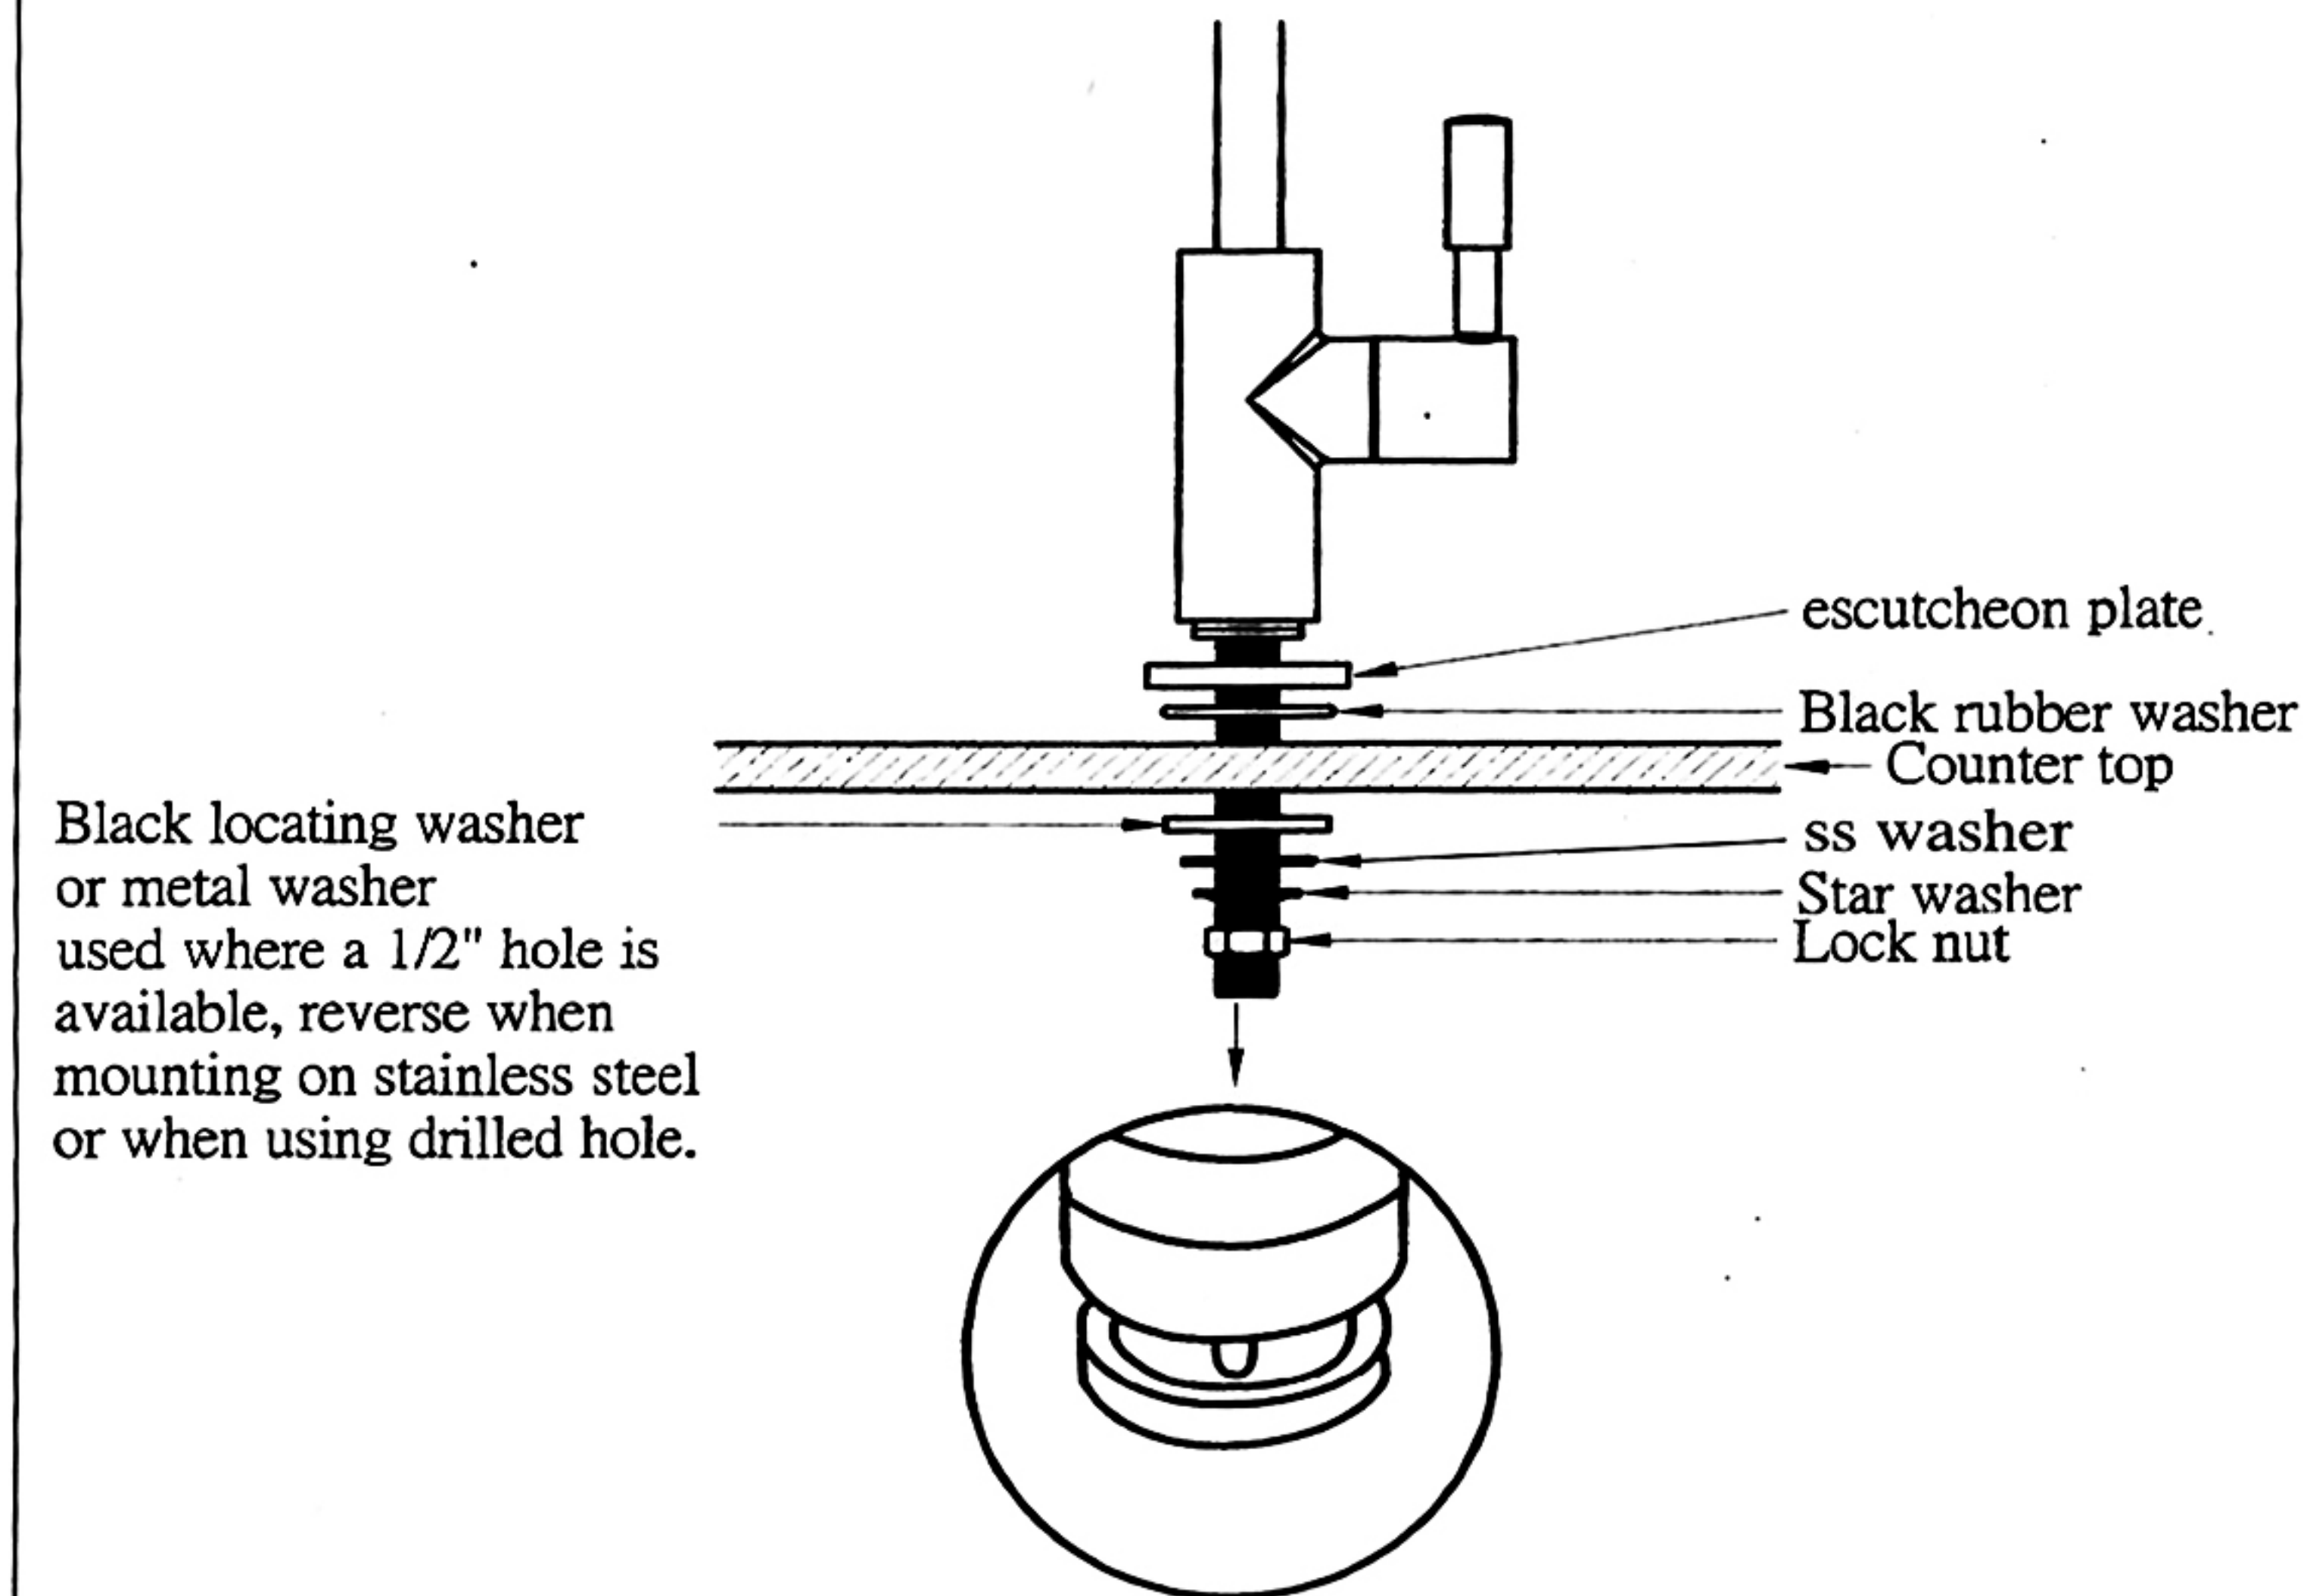

## Installation of Air Gap Faucet

1. Drill a 7/8" hole in the sink or counter top or use the available hole.
2. Place the escutcheon plate and the rubber washer on the base of the faucet
3. Attach the 1/4" brine water discharge line to the brine input (small) barb and 1/4" or 3/8" drain line to the brine output (large) barb.
4. Mount the faucet and assemble the hardware as shown.

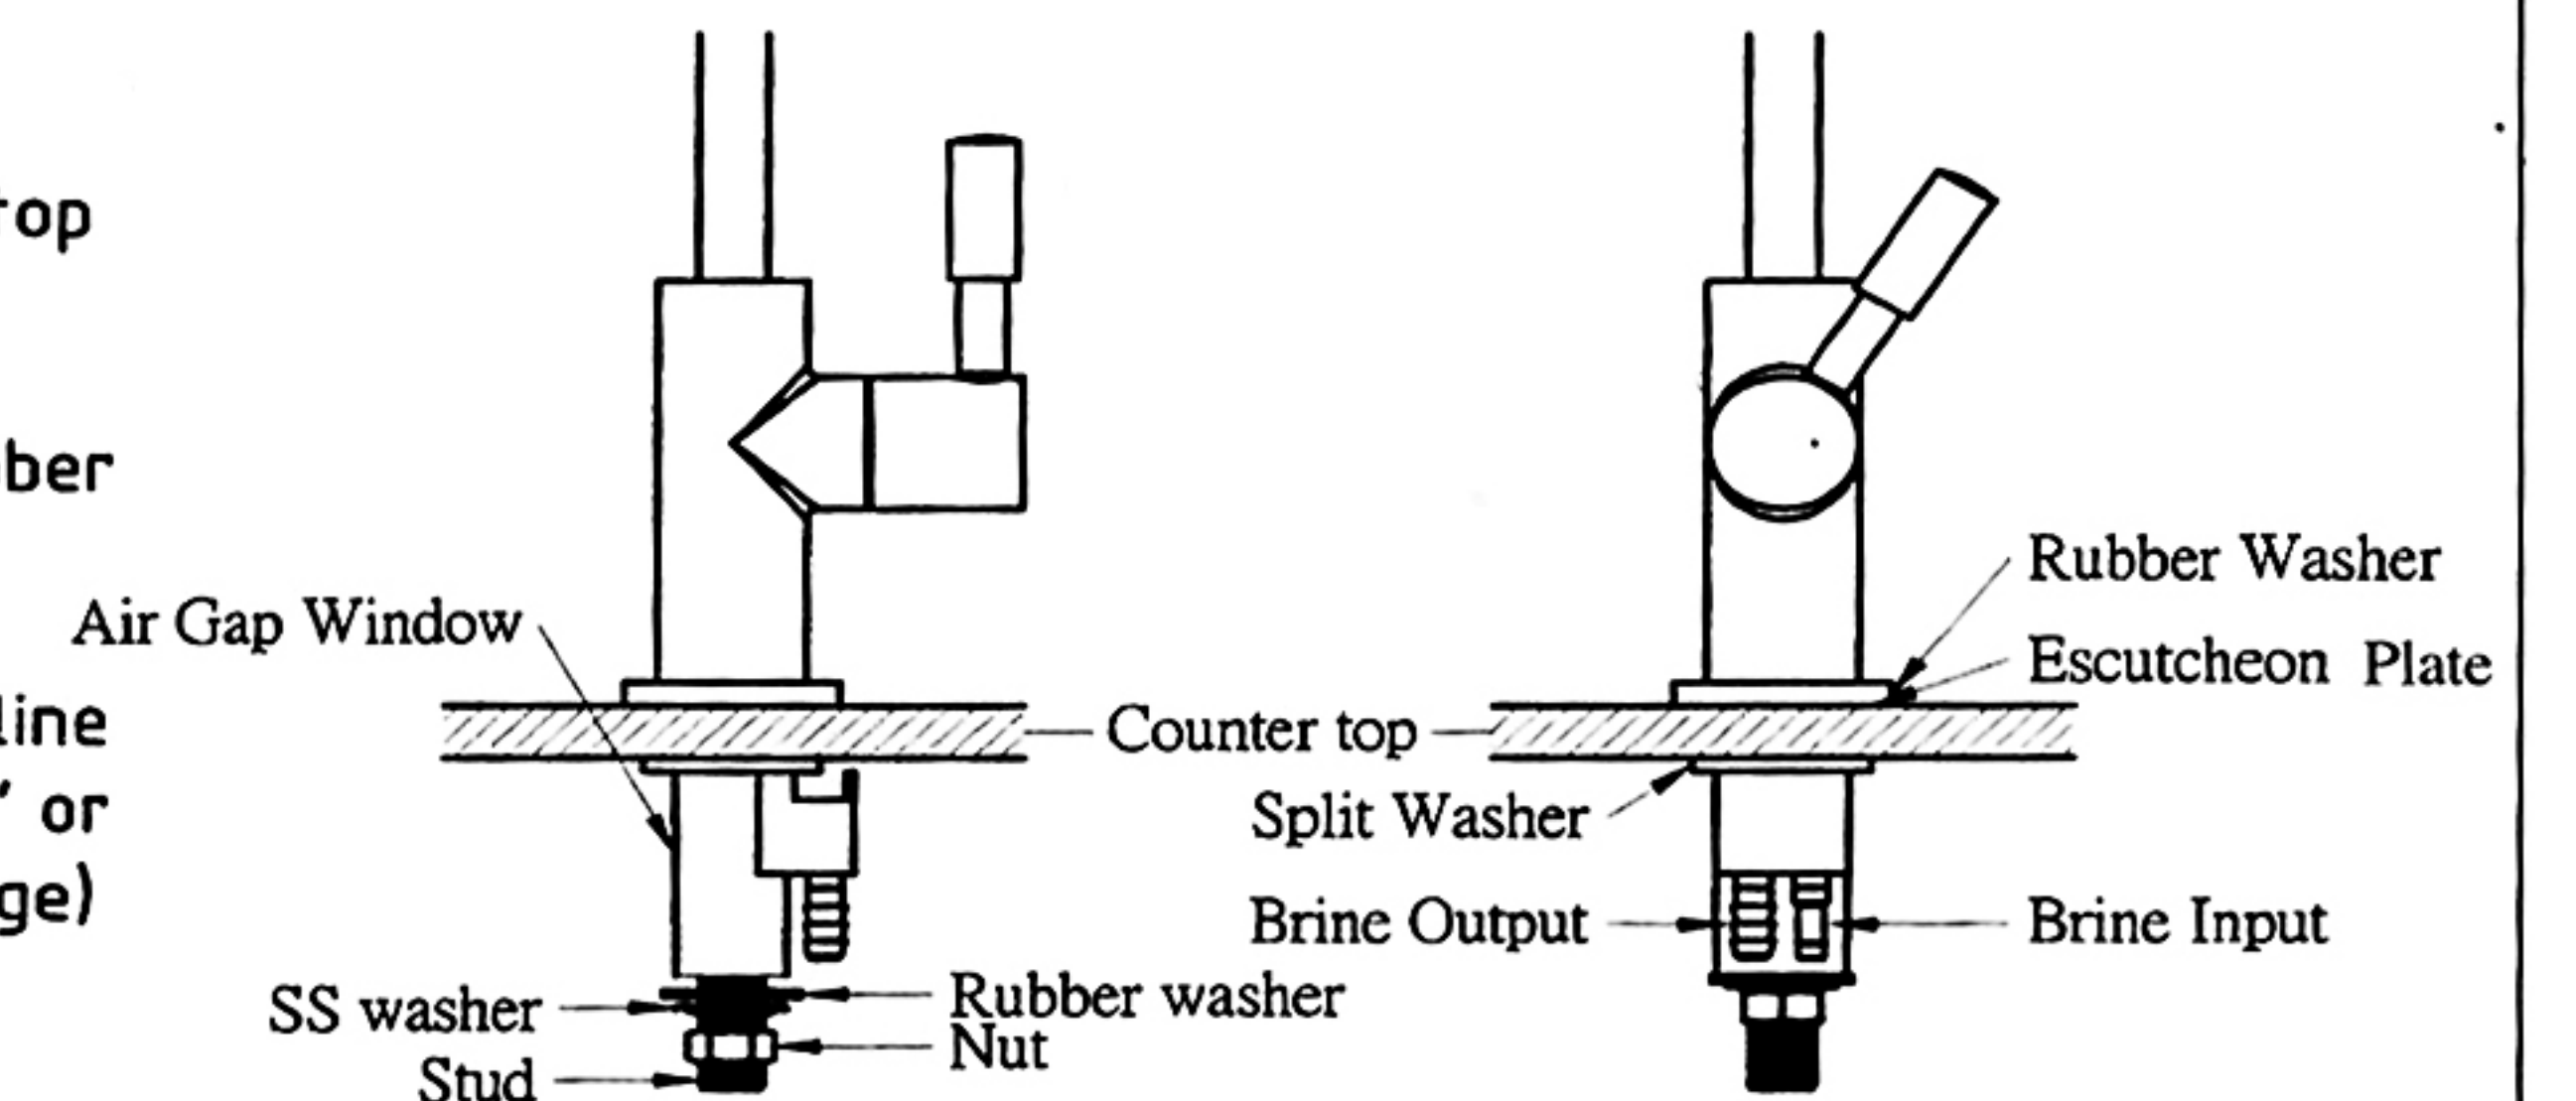


## Important Notice for Routine Maintenance and Care

- To clean, use mild soap, water, and a soft sponge or cloth.
  - If used with hard water, it is absolutely necessary to clean and dry the faucet immediately after every use.
- Avoid cleaning with chemicals, solvents, or harsh detergents (this may seriously harm surface area)

MANUFACTURER: SHYANG YIH HARDWARE FACTORY (Taiwan)

# DYRO905 INSTALLATION INSTRUCTION

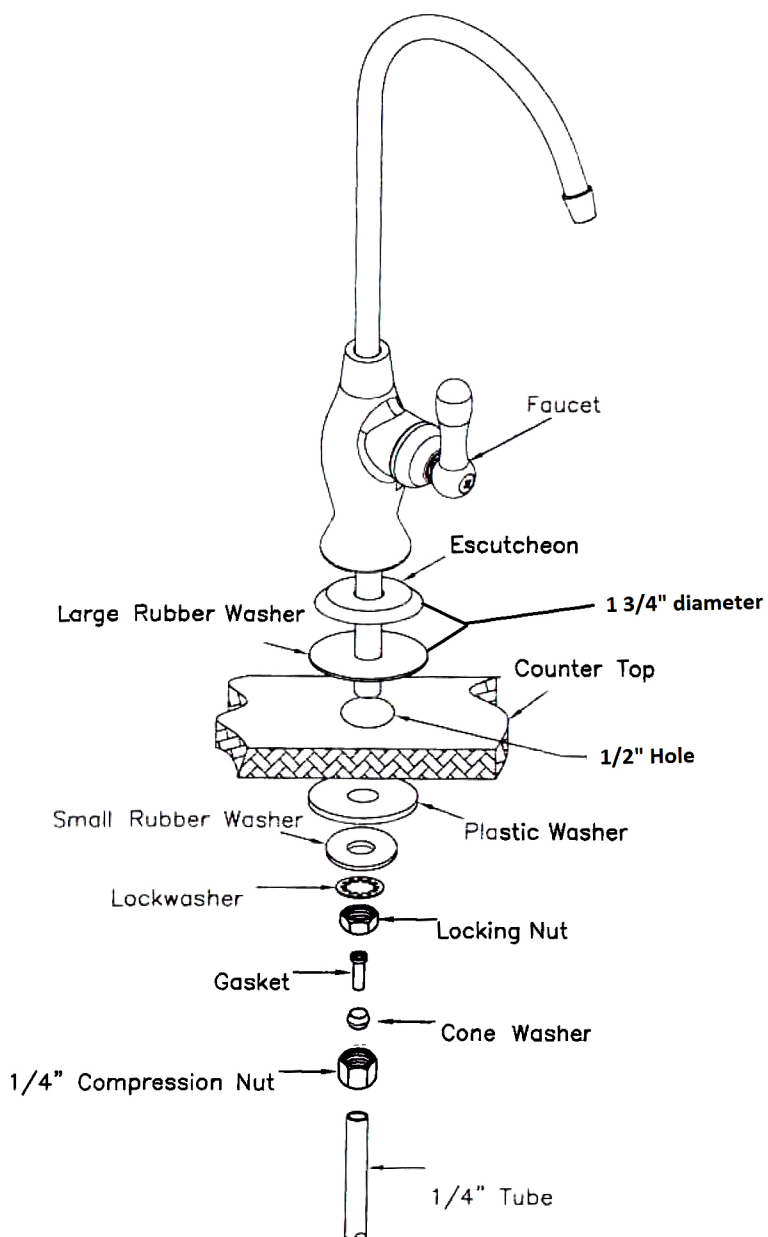

Connect to filtered water